


Mini Electric Hoist Series

Latest European Standard Attestation With Up and Down Position Limit Certified for CE, GS, EMC & RoHS

PA200—PA990

TECHNIQUE PARAMETER

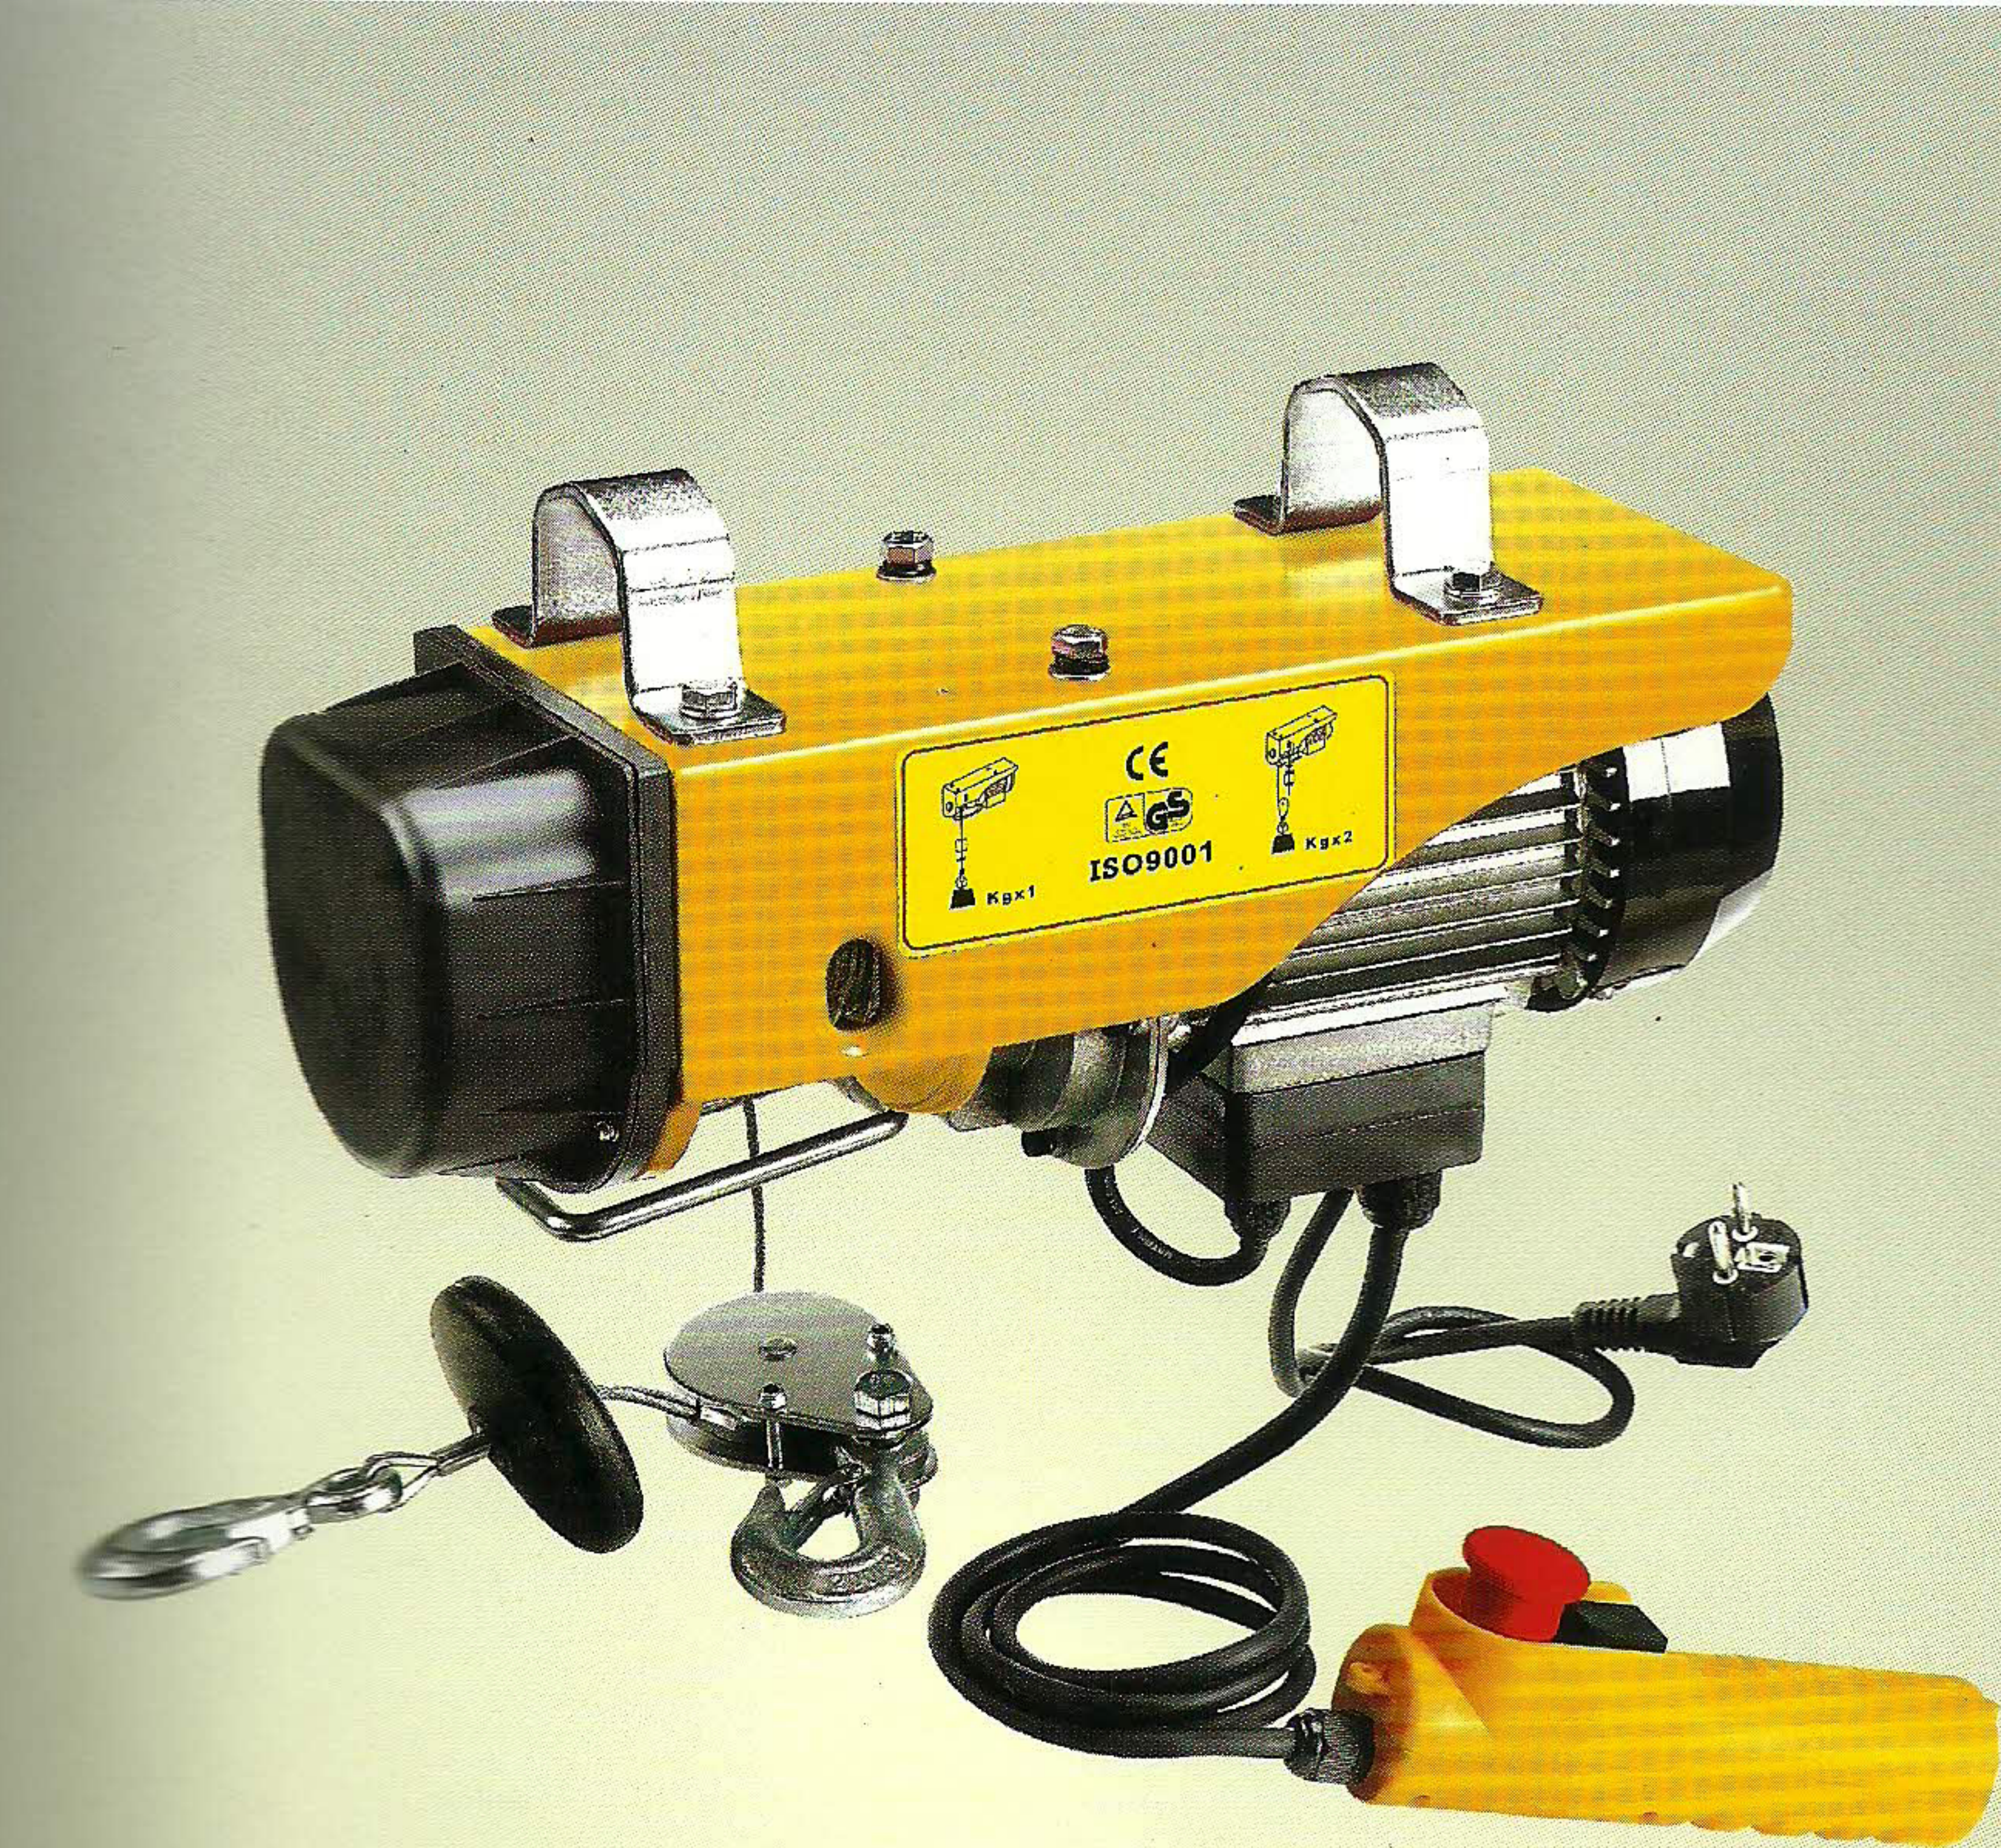

FEATURES

- Adapt urgent stop switch and reinforced breaking switch with position limit.
- Protection class up to IP54
- With thermal prevention device

Model	HGS -B-200 PA200	HGS -B-250 PA250	HGS -B-300 PA300	HGS -B-400 PA400	HGS -B-500 PA500	HGS -B-600 PA600	HGS -B-700 PA700	HGS -B-800 PA800	HGS -B-990 PA990
Method of Use	Double-Hook Single-Hook	Double-Hook Single-Hook	Double-Hook Single-Hook	Double-Hook Single-Hook	Double-Hook Single-Hook	Double-Hook Single-Hook	Double-Hook Single-Hook	Double-Hook Single-Hook	Double-Hook Single-Hook
Rated Volt (V)	AC 220/230/240 50/60Hz								
Input Power (W)	480	510	600	950	1020	1200	1250	1300	1600
Rated Capacity (kg)	100 200	125 250	150 300	200 400	250 500	300 600	350 700	400 800	500 1000
Lifting Speed (m/min)	10 5	10 5	10 5	10 5	10 5	10 5	8 4	8 4	8 4
Lifting Height (m)	12 6	12 6	12 6	12 6	12 6	12 6	12 6	12 6	12 6
Qty. /CTN (pcs)	2				1				
Packing Size (mm)	490×430×160		520×480×170			540×505×195			560 ×250 ×350
G.W. /N.W. (kg)	26 / 24		37 / 35			41 / 39			35/33